



# Polycom® SoundStation VTX 1000™

The world's first wideband conference phone

## Benefits

**Acoustic Clarity Technology** – Allows simultaneous natural conversation – the industry's best full-duplex

**Unparalleled room coverage** – Speak naturally from up to 20-feet from a microphone and be heard clearly on the far-end

**Revolutionary voice quality** – The world's first phone to deliver wideband voice over ordinary telephone lines; it's like going from black and white to color TV!

**Built-in investment protection** – The world's first conference phone that allows you to download new software remotely through an ordinary telephone line to add new features and applications. Ask about our SharedCare Plus Program

**Resists interference from mobile phones** – Clearer calls with no distracting noise from wireless devices

**Maximum configuration flexibility** – Has independent input and output, bass/treble controls, and internal mic and speaker control for multiple uses and applications including external speakers

**Easy to install/easy to use** – Start conferencing in minutes!

**Easy integration** – With Polycom Vortex® installed room systems, Polycom VSX™ group video conferencing solutions and Global Management System™

## Revolutionary voice quality and clarity from up to 20 feet away.

The Polycom SoundStation VTX 1000 with Acoustic Clarity Technology is truly a leap in voice conferencing technology. It's the world's first conference phone that *automatically* adapts to each meeting environment, providing high fidelity voice clarity for *all* participants. With the SoundStation VTX 1000, conference call participants can speak at a normal, natural conversation level and be heard clearly from up to 20-feet away from the microphone – even in large conference rooms. And, when two SoundStation VTX 1000 conference phones connect on opposite ends of a call, the phones automatically connect in Polycom HD Voice, resulting in extraordinary fidelity. SoundStation VTX 1000 is the voice platform for the future. No wonder Polycom is the #1 choice in conference phones, worldwide.


In today's Internet driven world, the ability to conduct real time communication and collaboration has become critical to an organization's survival. As the market leader in voice, video, data and Web solutions, our award-winning conference technology makes it easy for people to interact and maximize productivity – over any network, in just about any environment, anywhere around the globe. That's why more organizations worldwide use and prefer Polycom conferencing solutions. Because when people work together, great things happen. To learn more, please visit the Polycom Experience Center at [www.polycom.com/experience](http://www.polycom.com/experience)



## Polycom HD Voice

Narrowband  
300 - 3300 Hz  
(All Other Telephones)

Polycom HD Voice  
80 - 7000 Hz

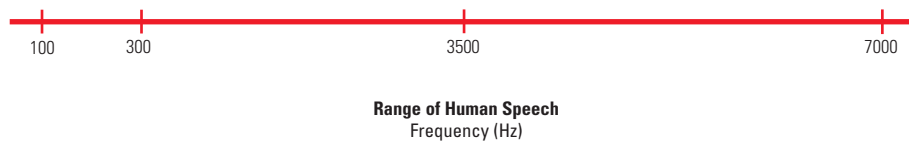

# Polycom SoundStation VTX 1000 Specifications

## Additional SoundStation VTX 1000 features/benefits

- Noise reduction technology automatically minimizes PC, projector, and HVAC sounds
- Automatic mic selection – only one mic is on at a time to remove “in the well” sound
- Independent microphone, echo-cancelled channels that optimize to their individual environment for better sound
- Includes technology that resists interference from mobile phones and other wireless devices
- Extension mics provide even greater room coverage for larger rooms
- Subwoofer for audio extension down to 80 Hz, which provides clearer, lifelike sound

### Console

#### Size (L x W x H)

- 14.5 x 12.25 x 2.5 in  
(36.8 x 31.1 x 6.4 cm)

#### Weight

- 1.75 lb. (0.8 kg)
- Power
- 22VDC nominal; supplied by interface module

#### Display

- High-resolution backlit graphical LCD

#### Caller ID

- Bellcore type 1 (requires a telephone company subscription for activation)

#### Keypad

- 12-key telephone keypad
- On-hook/off-hook, conference, mute, volume up/down keys, menu, navigation keys
- 3 content-dependent soft keys including redial, hold

#### Console Loudspeaker

- Frequency response: 300 Hz to 3.3 kHz in narrowband mode, 80 Hz to 7 kHz in wideband mode
- Volume: adjustable to 89 dB (peak) volume at 0.5 meters

#### Treble/Bass Controls

- Adjustment range: ± 6 dB

#### Console Microphones

- 3 cardioid microphones 80 Hz - 7 kHz

#### Console Interface

- RJ-45: proprietary P8 interface to interface module
- RJ-11: 32 Mbps serial link for future expansion
- 2 EX microphone connections

### Sub-woofer

#### Size (L x W x H)

- 8.750 x 5.150 x 9.2125 in  
(2.22 x 1.31 x 2.32 cm)

#### Weight

- 5.75 lb. (2.61 kg)

#### Miscellaneous

- Frequency response: 80 to 300 Hz in wideband mode
- Power: switchable 110/220 V, 50/60 Hz (100 V for Japan) includes country-specific AC cable

### Interface module

#### Size

- 3.125 x 7.75 x 1.875 in  
(7.9 x 19.7 x 4.8 cm)

#### Weight

- 0.75 lbs (0.34 kg)

#### Power

- 90 - 264 VAC, 50 - 60 Hz includes country-specific AC cable

### Auxiliary audio

#### Input

- Style: phono jack
- Function: switchable between Polycom wireless mic/AUDIO IN/OFF
- Softkey configurable setup menus

#### Output

- Style: phono jack
- Function: switchable between subwoofer/external PA/record out/OFF
- Softkey configurable setup menus

See user documentation for further specifications

### Telco Interface

- Network connection: 2-wire RJ-11 analog PBX or PSTN interface
- Speech mode
  - Bandwidth 300 Hz to 3.3 kHz or 80 Hz to 7 kHz (point-to-point)
- Network requirements: compatible with standard PSTN and PBX networks, analog or G.711 encoded
- Software download mode
  - Download protocol: V.34 compatible
  - Connection rates: to 33 Kbps, depending on line quality
  - Download server: Polycom download server

### Extension Microphones

- 2 cardioid extension microphones (included), 80 Hz-7 kHz

### Regulatory Compliance

- Safety
  - UL 1950
  - CSA C22.2, no. 950
  - EN6-950
  - IEC60950AS/NZS3260
- EMC
  - FCC (47 CFR Part 15) Class B
  - ICES-003 Class B
  - EN55022 Class B
  - CISPR 22 Class B
  - AS/NZS 3548 Class B
  - VCCI Class B
  - EN50224

### Environmental Requirements

- Operating temperature: 40° - 104°F (5° - 40°C)
- Relative humidity: 20% - 85% (noncondensing)
- Storage temperature: -22° - 131°F (-30° - 55°C)

### Recommended Room Conditions

- Reverberation time: <0.54 seconds
- Noise level: <48 dBA

### Warranty

- 12 months

### Part Number

- 2200-07300-001 (Console only)

EX microphones and subwoofer purchased separately

### SoundStation VTX 1000 Ships With:

- Tabletop console with integrated display and keypad
- Power/network interface module
- User documentation (user guide, quick installation guide, registration card)
- Cables
  - 1 Power cable (console)
  - 1 21-ft. (6.4m) console cable
  - 1 7-ft. (2.1m) telco cable

### Audio Enhancements

- Automatic Gain Control (AGC)
- Dynamic Noise Reduction
- Gated microphones with intelligent microphone mixing
- 80 Hz to 7 kHz VTX wideband audio

©2008 Polycom, Inc. All rights reserved.

Polycom, the Polycom logo, SoundStation, SoundStation Premier and Vortex are registered trademarks and VoiceStation, VSX, VTX, The Polycom Office, Global Management System, SoundStation VTX 1000 and the industrial design of SoundStation are trademarks of Polycom, Inc. in the U.S. and various countries. All other trademarks are the property of their respective companies. Specifications subject to change without notice.



**Polycom Headquarters:**

4750 Willow Road, Pleasanton, CA 94588 (T) 1.800.POLYCOM (765.9266) for North America only.  
For North America, Latin America and Caribbean (T) +1.925.924.6000, (F) +1.925.924.6100

**Polycom EMEA:**

270 Bath Road, Slough, Berkshire SL1 4DX, (T) +44 (0)1753 723000, (F) +44 (0)1753 723010

**Polycom Asia Pacific:**

Polycom Hong Kong Ltd., Rm 1101 MassMutual Tower, 38 Gloucester Road, Wanchai, Hong Kong, (T) +852.2861.3113, (F) +852.2866.8028

Part No. 3726-07633-001 Rev. 01/058